



Jackson Labs Technologies, Inc.

DATE: MARCH 5, 2014

1635 Village Ctr. Cir. dr., Suite 150., Las Vegas, NV 89134
Phone 702-233-1334 - Fax 702-233-1073
sales@jackson-labs.com

LETTER OF VOLATILITY

To Whom It May Concern:


Thank you for requesting a letter of volatility for the device you purchased. We take security very seriously, and are glad to share the volatility information of our products with you.

The Jackson Labs Technologies, Inc. LC_XO and FireFly-1A products contain the following memory devices:
EEPROM for parameter and location storage - user accessible, 2KB
Processor - parameter storage, 2KB
Processor - Executable Program Memory storage 512KB

GPSDO memory	User Accessible (Y/N)	Write protect procedure
2KB Parameter EEPROM	Y	Disconnecting/disabling the serial ports
2KB Processor memory	N	No access given through software, contains factory default values only
512KB Flash	N	Via Jumper

Normal user commands via the serial port do not allow memory access other than changing the device settings. Firmware updates via the serial port require physically changing a jumper setting. No location information is stored in the devices. EEPROM parameter memory can be cleared (erased) to factory-default settings using the "syst:factoryreset once" command. Issuing this command will delete factory calibration data as well.

Further information in regards to this product is available upon request.

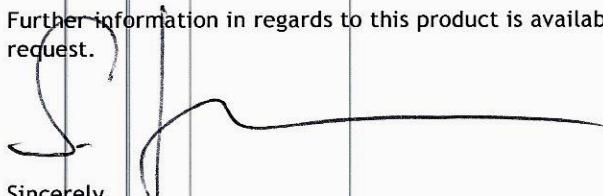

Sincerely,
Said Jackson
President
Jackson Labs Technologies, Inc.