

# N321

## Contents

- 1 Notice
- 2 Device Overview
- 3 Key Features
  - ◆ 3.1 N320
  - ◆ 3.2 N321
- 4 RF Specifications
  - ◆ 4.1 Transmitter
  - ◆ 4.2 Receiver
  - ◆ 4.3 Onboard DRAM
- 5 Power
- 6 Hardware Specifications
  - ◆ 6.1 N320
  - ◆ 6.2 N321
  - ◆ 6.3 Clocking and Sampling Rates
- 7 Physical Specifications
  - ◆ 7.1 Dimensions
  - ◆ 7.2 Weight
  - ◆ 7.3 Drawings
    - ◇ 7.3.1 N320
    - ◇ 7.3.2 N321
  - ◆ 7.4 CAD/STP Models
- 8 Environmental Specifications
  - ◆ 8.1 Operating Temperature Range
  - ◆ 8.2 Storage Temperature Range
  - ◆ 8.3 Operating Humidity Range
- 9 Schematics
  - ◆ 9.1 N320/N321
- 10 GPSDO
  - ◆ 10.1 Sensors
  - ◆ 10.2 Specifications
  - ◆ 10.3 Datasheet
- 11 FPGA
  - ◆ 11.1 FPGA User Modifications
- 12 Interfaces and Connectivity
  - ◆ 12.1 N320
    - ◇ 12.1.1 Front Panel
    - ◇ 12.1.2 Rear Panel
    - ◇ 12.1.3 Front Panel GPIO (N320 Only)
      - 12.1.3.1 Power on state
      - 12.1.3.2 Pin Mapping
  - ◆ 12.2 N321
    - ◇ 12.2.1 Front Panel
    - ◇ 12.2.2 Rear Panel
  - ◆ 12.3 Ref Clock - 10 MHz
  - ◆ 12.4 PPS - Pulse Per Second
- 13 Certifications
  - ◆ 13.1 RoHS
  - ◆ 13.2 China RoHS
- 14 Certificate of Volatility
- 15 Downloads
- 16 Choosing a Host Interface
  - ◆ 16.1 10 Gigabit Ethernet
- 17 International Power Supply Options
- 18 Option: USRP N320/N321 Rackmount
- 19 Guidance on SFP+ Adapters for Fiber Connectivity on USRP N320/N321
  - ◆ 19.1 Known-Good Adapters
  - ◆ 19.2 Known-Good Cables
- 20 Guidance on 10Gb SFP+ to RJ45 Adapters
  - ◆ 20.1 Known-Good Adapters

**When you receive a brand-new device, it is strongly recommended that you download the most recent filesystem image from the Ettus Research website and write it to the SD card that comes with the unit. It is not recommended that you use the SD card from the factory as-is. Instructions on downloading the latest filesystem image and writing it to the SD card are listed below.**

**Note that if you are operating the device in Network Mode, then the versions of UHD running on the host computer and on the USRP N320/N321 device must match.**

The USRP N320 is a networked software defined radio that provides reliability and fault-tolerance for deployment in large scale and distributed wireless systems. This is a high performance SDR that uses a unique RF design by Ettus Research to provide 2 RX and 2 TX channels in a half-wide RU form factor. Each channel provides up to 200 MHz of instantaneous bandwidth, and covers a frequency range from 3 MHz to 6 GHz. The baseband processor uses the Xilinx Zynq-7100 SoC to deliver a large user programmable FPGA for real-time, low latency processing and a dual-core ARM CPU for stand-alone operation. Support for 1 GbE, 10 GbE, and *Aurora* interfaces over two SFP+ ports and 1 QSFP+ port enables high throughput IQ streaming to a host PC or FPGA coprocessor. A flexible synchronization architecture with support for LO sharing for TX and RX, 10 MHz clock reference, PPS time reference, GPSDO, and White Rabbit enables implementation of phase coherent MIMO testbeds. The USRP N320 leverages recent software developments in UHD to simplify control and management of multiple devices over the network with the unique capability to remotely administrate tasks such as debugging, updating software, rebooting, resetting to factory state, and monitoring system health.

- Xilinx Zynq-7100 FPGA SoC
- Dual-core ARM A9 800 MHz CPU
- 2 RX, 2 TX in half-wide RU form factor
- 3 MHz ? 6 GHz frequency range [NOTE: phase coherence requires minimum of 450 MHz RF center frequency]
- Up to 200 MHz of instantaneous bandwidth per channel
- Sub-octave RX, TX filter bank
- 14 bit ADC, 16 bit DAC
- Configurable sample rates: 200, 245.76, 250 MS/s
- Two SFP+ ports (1 GbE, 10 GbE, *Aurora*, White Rabbit)
- One QSFP+ port ( 2x 10Gb / *Aurora* )
- RJ45 (1 GbE)
- 10 MHz clock reference
- PPS time reference
- External RX, TX LO input ports
- Built-in GPSDO
- 1 Type A USB host port
- 1 micro-USB port (serial console, JTAG)
- Trusted Platform Module (TPM) v1.2
- Watchdog timer
- OpenEmbedded Linux
- Reliable and fault-tolerant deployment
- Remote management capability
- Stand-alone operation



- Xilinx Zynq-7100 FPGA SoC
- Dual-core ARM A9 800 MHz CPU
- 2 RX, 2 TX in half-wide RU form factor
- 3 MHz ? 6 GHz frequency range [NOTE: phase coherence requires minimum of 450 MHz RF center frequency]
- Up to 200 MHz of instantaneous bandwidth per channel
- Sub-octave RX, TX filter bank
- 14 bit ADC, 16 bit DAC
- Configurable sample rates: 200, 245.76, 250 MS/s
- Two SFP+ ports (1 GbE, 10 GbE, *Aurora*, White Rabbit)
- One QSFP+ port ( 2x 10Gb / *Aurora* )
- RJ45 (1 GbE)
- 10 MHz clock reference
- PPS time reference
- External RX, TX LO input ports
- LO Distribution for up to 128x128 MIMO
- Built-in GPSDO
- 1 Type A USB host port
- 1 micro-USB port (serial console, JTAG)
- Trusted Platform Module (TPM) v1.2
- Watchdog timer
- OpenEmbedded Linux
- Reliable and fault-tolerant deployment
- Remote management capability
- Stand-alone operation



- Number of channels: 2
- Frequency Range: 3 MHz to 6 GHz
- Maximum instantaneous bandwidth: 200 MHz

- Maximum output power (P<sub>out</sub>): See Table 1
- Gain range
  - ◆ 0 dB to 60 dB (1 MHz to 6 GHz)
- Gain step: 1 dB
- Supported I/Q sample rates:
  - ◆ 200 MHz, 245.76 MHz, 250 MHz
- Output third-order intercept (OIP3) See Table 2
- Tuning Time: 245 us
- TX/RX Switching Time: 750 ns
- Filter Banks
  - ◆ 450 ? 650 MHz
  - ◆ 650 ? 1000 MHz
  - ◆ 1000 ? 1350 MHz
  - ◆ 1350 ? 1900 MHz
  - ◆ 1900 ? 3000 MHz
  - ◆ 3000 ? 4100 MHz
  - ◆ 4100 ? 6000 MHz
- External LO Frequency Range (required for phase coherence): 450 MHz - 6.0 GHz

Frequency	Maximum Output Power
3 MHz - 450 MHz	+10 dBm
450 MHz - 1000 MHz	+20 dBm
1 GHz - 4.25 GHz	+18 dBm
4.25 GHz - 6 GHz	+15 dBm

Table 1: Maximum Output Power

Frequency	Output Third-Order Intercept (OIP3)
3 MHz - 450 MHz	> 15 dBm
450 MHz - 1.6 GHz	> 28 dBm
1.6 GHz - 5.8 GHz	> 25 dBm
5.8 GHz - 6.0 GHz	> 23 dBm

Table 2: Output Third-Order Intercept (OIP3)

Frequency Offset	1.0 GHz	2.0 GHz	3.0 GHz	5.5 GHz
10 kHz	-117	-110	-108	-103
100 kHz	-117	-110	-108	-104
1 MHz	-145	-137	-135	-130

Table 3: TX Phase Noise (dBc/Hz)

- Number of channels: 2
- Frequency Range: 3 MHz to 6 GHz
- Maximum instantaneous bandwidth: 200 MHz
- Gain range
  - ◆ 0 dB to 60 dB (1 MHz to 6 GHz)
- Gain step: 1 dB
- Maximum recommended input power (P<sub>in</sub>) 1 dB: -15 dBm
- Noise figure: See Table 3
- Third-order intermodulation distortion (IMD3) See Table 4
- Supported I/Q sample rates
  - ◆ 200 MHz, 245.76 MHz, 250 MHz
- Tuning Time: 245 us
- TX/RX Switching Time: 750 ns
- Filter Banks
  - ◆ 450 ? 760 MHz
  - ◆ 760 ? 1100 MHz
  - ◆ 1100 ? 1410 MHz
  - ◆ 1410 ? 2050 MHz
  - ◆ 2050 ? 3000 MHz
  - ◆ 3000 ? 4500 MHz
  - ◆ 4500 ? 6000 MHz
- External LO Frequency Range (required for phase coherence): 450 MHz - 6.0 GHz

Frequency	TX/RX Port Noise Figure	RX2 Port Noise Figure
< 800 MHz	11.0 dB	10.0 dB

800 MHz - 1.8 GHz	6.5 dB	5.5 dB
1.8 GHz - 2.8 GHz	7.0 dB	6.0 dB
2.8 GHz - 3.8 GHz	7.5 dB	6.5 dB
3.8 GHz - 5.0 GHz	8.5 dB	7.5 dB
5.0 GHz - 6.0 GHz	11.0 dB	10.0 dB

Table 3: RX Noise Figure

Frequency	RX Input Third-Order Intercept (IIP3) (dBm)
450 MHz - 1.0 GHz	> 13 dBm
1.0 GHz - 4.5 GHz	> 17 dBm
4.5 GHz - 6.0 GHz	> 16 dBm

Table 4: RX Input Third-Order Intercept (IIP3) (dBm)

- DDR3 Memory size
  - ◆ 2,048 MB (PL)
  - ◆ 1,024 MB (PS)

You must use either the Level VI Efficiency power supply provided in the shipping kit, or another UL listed ITE power supply marked ?LPS, with the USRP N320/N321.

- Input voltage: 12 VDC
- Input current: 7.0 A, maximum
- Typical power consumption: 60 W to 75 W, varies by application

- Ettus Research recommends to always use the latest stable version of UHD
- If you need to clean the module, wipe it with a dry towel.

- Current Hardware Revision: A
- Minimum version of UHD required: 3.14.0.0
- Due to product compliance restrictions on products with TPM (Trusted Platform Module) components to a few countries, the USRP N320/N321 is available in two variants:
  - ◆ Standard variant with TPM
  - ◆ Non-TPM variant

- Current Hardware Revision: A
- Minimum version of UHD required: 3.14.0.0
- Due to product compliance restrictions on products with TPM (Trusted Platform Module) components to a few countries, the USRP N320/N321 is available in two variants:
  - ◆ Standard variant with TPM
  - ◆ Non-TPM variant

There are three master clock rates (MCR) supported on the N320/N321: 200 MHz, 245.76 MHz, 250 MHz

The sampling rate must be an integer decimation rate of the MCR. Ideally, this decimation factor should be an even number. An odd decimation factor will result in additional unwanted attenuation (roll-off from the CIC filter in the DUC and DDC blocks in the FPGA). The valid decimation rates are between 1 and 1024.

If the desired sampling rate is not directly supported by the hardware, then it will be necessary to re-sample in software. This can be done in C++ using libraries such as Liquid DSP [1], or can be done in GNU Radio, in which there are three blocks that perform sampling rate conversion.

**(L x W x H)**

- 35.71 cm x 21.11 cm x 4.37 cm
- 14.06 in. x 8.31 in. x 1.72 in.

- 3.13 kg

- [Media:cu usrp-n320.pdf](#)

- [Media:cu usrp-n321.pdf](#)

- [Media:USRP\\_N320.stp.7z](#)
- [Media:USRP\\_N321.stp.7z](#)

- N320 / N321: 0 to 50 °C

- N320 / N321: -40 to 70 °C

- 10% to 90% non-condensing

- Motherboard: [File:USRP N3XX MB Schematic.pdf](#)
- Daughterboard: [File:N32X Daughterboard Schematic.pdf](#)

- Support GPSDO NMEA Strings

You can query the lock status with the `gps_locked` sensor, as well as obtain raw NMEA sentences using the `gps_gprmc`, and `gps_gpgga` sensors. Location information can be parsed out of the `gps_gpgga` sensor by using `gpsd` or another NMEA parser.

### Module Specifications

1 PPS Timing Accuracy from GPS receiver	<8ns to UTC RMS (1-Sigma) GPS Locked
Holdover Stability (1 week with GPS)	<±50us over 3 Hour Period @+25°C (No Motion, No Airflow)
1 PPS Output	3.3VDC CMOS
Serial Port	TTL Level, GPS NMEA Output with 1Hz or 5Hz update rate, Integrated into UHD
GPS Frequency	L1, C/A 1574MHz
GPS Antenna	Active (3V compatible) or Passive (0dB to +30dB gain)
GPS Receiver	65 Channels, QZSS, SBAS WAAS, EGNOS, MSAS capable
Sensitivity	Supports Position and Hold over-determined clock mode
TTFF	Acquisition -148dBm, Tracking -165dBm
ADEV	Cold Start: <32 sec, Warm Start: 1 sec, Hot Start: 1 sec
Warm Up Time / Stabilization Time	10s: <7E-011
Supply Voltage (Vdd)	10Ks: <2E-012 (GPS Locked, 25°C, no motion, no airflow)
Power Consumption	<10 min at +25C to 1E-09 Accuracy
Operating Temperature	3.3V Single-Supply, +0.2V/-0.15V
Storage Temperature	<0.16W
	-10°C to +70°C
	-45C to 85C

### Oscillator Specifications (internal)


Frequency	20MHz CMOS 3Vpp
Output of crystal	0Vpp CMOS
Phase Noise	Amplitude
20MHz After 1 Hour @ 25°C without GPS	20MHz
RF Jitter (100Hz to 10MHz)	Phase
135ps rms	Jitter
Frequency Stability	±100ppm (internal TCXO)
Over Temperature (0°C to +60°C)	Temperature
Warm Up Time	±1 min at +25C
1Hz	-65 dBc/Hz
Phase Noise at 100Hz	-97 dBc/Hz
20MHz	-116 dBc/Hz
10kHz	-136 dBc/Hz
100 kHz	<-148 dBc/Hz
	<-155 dBc/Hz

- Spec Sheet: [http://www.jackson-labs.com/assets/uploads/main/LTE-Lite\\_specsheets\\_20MHz.pdf](http://www.jackson-labs.com/assets/uploads/main/LTE-Lite_specsheets_20MHz.pdf)
- User Manual: <http://www.jackson-labs.com/assets/uploads/main/LTE-Lite.pdf>

The Verilog code for the FPGA in the USRP N320/N321 is open-source, and users are free to modify and customize it for their needs. However, certain modifications may result in either bricking the device, or even in physical damage to the unit. Specifically, changing the I/O interface of the FPGA in any way, or modifying the pin and timing constraint files, could result in physical damage to other components on the motherboard, external to the FPGA, and doing this will void the warranty. The constraint files should not be modified. Please note that modifications to the FPGA are made at the risk of the user, and may not be covered by the warranty of the device.

- PWR: Power switch

- RF 0 Group

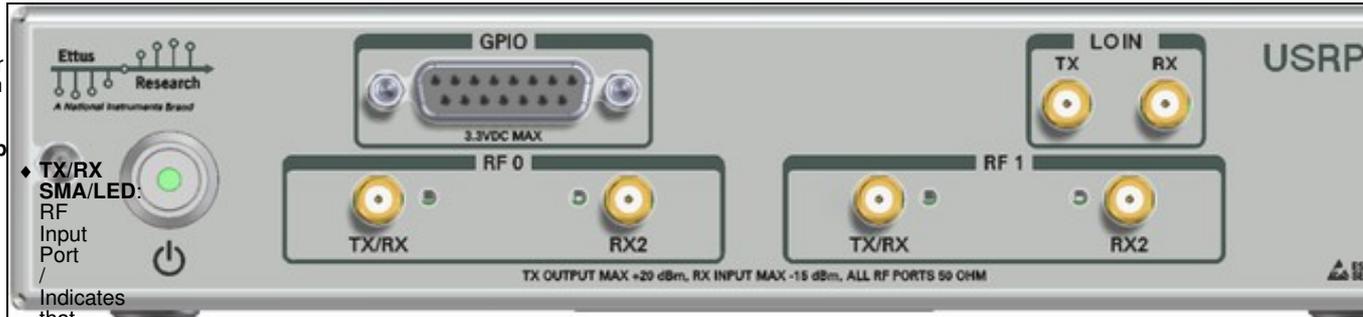

- ◆ TX/RX SMA/LED: RF Input Port / Indicates that data is streaming on the TX/RX channel on daughterboard 0, channel 0

- ◆ RX2 SMA/LED: RF Input Port / Indicates that data is streaming on the RX2 channel on daughterboard 0, channel 0

- RF 1 Group

- ◆ TX/RX SMA/LED: RF Input Port / Indicates that data is streaming on the TX/RX channel on daughterboard 1, channel 0.

- ◆ RX2 SMA/LED: RF Input Port / Indicates that data is streaming on

the  
RX2  
channel  
on  
daughterboard  
1,  
channel  
0

• **LO  
IN**

◆ **TX:**  
Input  
port  
for  
TX  
LO.  
Supported  
LO  
frequency  
range  
is  
from  
450  
MHz  
to  
6  
GHz.  
External  
LO  
inputs  
below  
450  
MHz  
are  
not  
supported.  
The  
LO  
input  
signal  
level  
should  
be  
+5  
dBm,  
but  
may  
be  
between  
+3  
dBm  
and  
+7  
dBm.

• ◆ **RX:**  
Input  
port  
for  
RX  
LO  
of  
Daughterboard  
0.  
Supported  
LO  
frequency  
range  
is  
from  
450  
MHz  
to  
6  
GHz.  
External  
LO  
inputs  
below  
450  
MHz  
are  
not  
supported.  
The  
LO  
input  
signal  
level  
should

be  
+5  
dBm,  
but  
may  
be  
between  
+3  
dBm  
and  
+7  
dBm.

- **GPIO**

- ◆ **GPIO:**  
DB15  
GPIO  
Interface.  
Additional  
details  
below.

- **GPS ANT:**  
Connection  
for  
the  
GPS  
antenna

- **REF IN:**  
Reference  
clock  
input

- **PPS/TRIG IN:**

- Input  
port  
for  
the  
PPS  
signal

- **TRIG OUT:**  
Output  
port  
for  
the  
exported  
PPS  
signal

- **PWR:**  
Connector  
for  
the  
USR  
P  
N320  
Series  
power  
supply

- **RESET:**  
Input  
button  
to  
reset  
device

- **MicroSD:**  
MicroSD  
Card  
for  
OE  
Linux  
File  
System

- **Console JTAG:**  
Micro  
USB  
connector  
for  
the  
on-board  
USB-JTAG  
programmer  
as  
well



as  
TTY  
login  
to  
the  
console

- **USB 2.0:**  
Host  
USB  
connector  
to  
ARM  
CPU
- **SFP+:**  
1/10Gb  
SFP+  
ports  
for  
Ethernet  
interfaces
- **QSFP+:**  
QSFP+  
port  
for  
Ethernet  
interfaces  
(2 x  
10Gb  
lanes)
- **10/100/1000:**  
10/100/1000  
Mb  
Ethernet  
interface  
to  
ARM  
CPU


The GPIO port is not meant to drive big loads. You should not try to source more than 5mA per pin.

The +3.3V is for ESD clamping purposes only and not designed to deliver high currents.

The hardware power on state and UHD initial state for the front-panel GPIOs is high-Z. For the N320, there are no external pull-ups/pull-downs for the GPIO pins, but the FPGAs do have them and they are configured as follows: pull-down.

- Pin 1: +3.3V
- Pin 2: Data[0]
- Pin 3: Data[1]
- Pin 4: Data[2]
- Pin 5: Data[3]
- Pin 6: Data[4]
- Pin 7: Data[5]
- Pin 8: Data[6]
- Pin 9: Data[7]
- Pin 10: Data[8]
- Pin 11: Data[9]
- Pin 12: Data[10]
- Pin 13: Data[11]
- Pin 14: 0V
- Pin 15: 0V

**Note:** Please see the [E3x0/X3x0/N3x0 GPIO API](#) for information on configuring and using the GPIO bus.

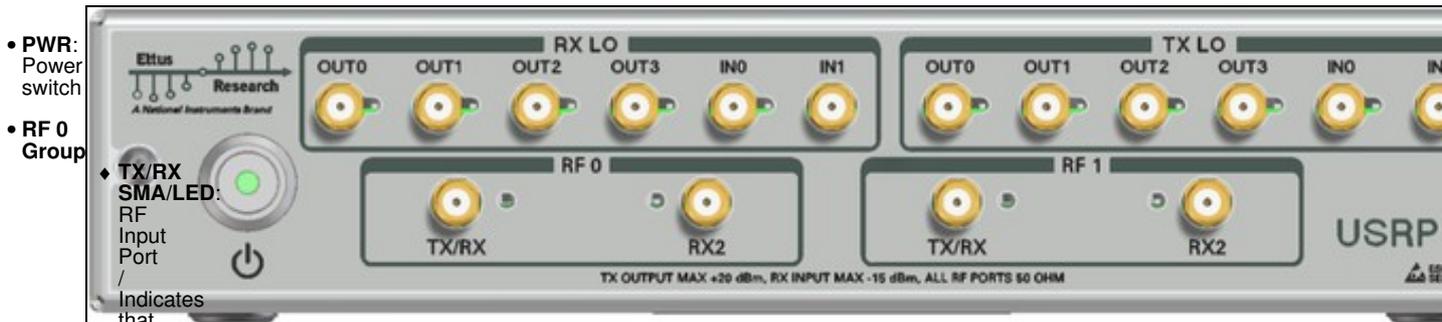

Indicates  
that  
data  
is  
streaming  
on  
the  
TX/RX  
channel

on  
daughterboard  
0,  
channel  
0  
◆ **RX2**  
**SMA/LED:**  
RF  
Input  
Port  
/  
Indicates  
that  
data  
is  
streaming  
on  
the  
RX2  
channel  
on  
daughterboard  
0,  
channel  
0

• **RF 1**  
**Group**

◆ **TX/RX**  
**SMA/LED:**  
RF  
Input  
Port  
/  
Indicates  
that  
data  
is  
streaming  
on  
the  
TX/RX  
channel  
on  
daughterboard  
1,  
channel  
0.

◆ **RX2**  
**SMA/LED:**  
RF  
Input  
Port  
/  
Indicates  
that  
data  
is  
streaming  
on  
the  
RX2  
channel  
on  
daughterboard  
1,  
channel  
0

• **TX**  
**LO**

◆ **IN0:**  
Input  
port  
for  
TX  
LO.  
Supported  
LO  
frequency  
range  
is  
from  
450  
MHz  
to  
6  
GHz.  
External  
LO  
inputs

below  
450  
MHz  
are  
not  
supported.  
The  
LO  
input  
signal  
level  
should  
be  
+5  
dBm,  
but  
may  
be  
between  
+3  
dBm  
and  
+7  
dBm.

◆ **IN1:**  
Input  
port  
for  
TX  
LO.  
Supported  
LO  
frequency  
range  
is  
from  
450  
MHz  
to  
6  
GHz.  
External  
LO  
inputs  
below  
450  
MHz  
are  
not  
supported.  
The  
LO  
input  
signal  
level  
should  
be  
+5  
dBm,  
but  
may  
be  
between  
+3  
dBm  
and  
+7  
dBm.

◆ **OUT0-3:**  
TX  
LO  
Outputs  
from  
1:4  
splitter

• **RX  
LO**

◆ **IN0:**  
Input  
port  
for  
RX  
LO  
of  
Daughterboard  
0.  
Supported  
LO  
frequency  
range

is  
from  
450  
MHz  
to  
6  
GHz.  
External  
LO  
inputs  
below  
450  
MHz  
are  
not  
supported.

The  
LO  
input  
signal  
level  
should  
be  
+5  
dBm,  
but  
may  
be  
between  
+3  
dBm  
and  
+7  
dBm.

◆ **IN1:**  
Input  
port  
for  
RX  
LO  
of  
Daughterboard  
0.

Supported  
LO  
frequency  
range  
is  
from  
450  
MHz  
to  
6  
GHz.  
External  
LO  
inputs  
below  
450  
MHz  
are  
not  
supported.

The  
LO  
input  
signal  
level  
should  
be  
+5  
dBm,  
but  
may  
be  
between  
+3  
dBm  
and  
+7  
dBm.

◆ **OUT0-3:**  
RX  
LO  
Outputs  
from  
1:4  
splitter



- **GPS ANT:** Connection for the GPS antenna
- **REF IN:** Reference clock input
- **PPS/TRIG IN:** Input port for the PPS signal
- **TRIG OUT:** Output port for the exported reference clock
- **PWR:** Connector for the USRP N320 Series power supply
- **RESET:** Input button to reset device
- **MicroSD:** MicroSD Card for OE Linux File System
- **JTAG:** Micro USB connector for the on-board USB-JTAG programmer
- **USB 2.0:** Host USB connector to ARM CPU
- **SFP+:** 1/10Gb SFP+ ports for Ethernet interfaces
- **QSFP+:** QSFP+ port for Ethernet interfaces (2 x 10Gb lanes)
- **10/1000/1000:** 10/100/1000 Mb

## Ethernet interface to ARM CPU

An external 10 MHz reference clock may be used. The optimal signal is a square wave as created by the [OctoClock/CDDA-2990](#). The input signal power level of the reference clock must not exceed +15 dBm.

Using a PPS signal for timestamp synchronization requires a square wave signal with 5 Vpp amplitude.

To test the PPS input, you can use the following tool from the UHD examples:

- `<args>` are device address arguments (optional if only one USRP device is on your machine)

```
cd <install-path>/lib/uhd/examples ./test_pps_input ?args=<args>
```

As of December 1st, 2010 all Ettus Research products are RoHS compliant unless otherwise noted. More information can be found at <http://ettus.com/legal/rohs-information>

## Management Methods for Controlling Pollution Caused by Electronic Information Products Regulation

### Chinese Customers

National Instruments is in compliance with the Chinese policy on the Restriction of Hazardous Substances (RoHS) used in Electronic Information Products. For more information about the National Instruments China RoHS compliance, visit [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china).

Found on the [NI Product Certifications lookup tool](#) here.

[FPGA Resources](#)

[UHD Stable Binaries](#)

[UHD Source Code on Github](#)

## Recommended 10 Gigabit Ethernet Cards

- Intel X520-DA2
  - ◆ [Intel® Ethernet Converged Network Adapter X520-DA2](#)
- Intel X520-DA1
  - ◆ [Intel® Ethernet Converged Network Adapter X520-DA1](#)
- Intel X710-DA2
  - ◆ [Intel® Ethernet Converged Network Adapter X710-DA2](#)
- Intel X710-DA4
  - ◆ [Intel® Ethernet Converged Network Adapter X710-DA4](#)
- Mellanox MCX4121A-ACAT
  - ◆ [Mellanox MCX4121A-ACAT](#)

The power supply provided with the USRP N320 kit is packaged with a power cord that is compatible with power outlets in the US/Japan. If you are not using the USRP N320 in the US/Japan, we recommend purchasing the International USRP N320 Power Cord set.

The USRP N320/N321 was designed to be used with a [1U Rackmount Assembly](#) for building high-density MIMO systems in a compact and well-organized setup. This mount *requires* two compatible USRPs, and provides rubber standoffs between the USRPs to avoid both direct contact and surface scratching. If the user will be developing in a laboratory environment or building a high-channel count USRP system, then a 1U Rackmount Assembly is highly recommended. This specific mount is compatible with only the USRP N300, N310, N320, and N321, and allows the integration of up to eight bidirectional RF channels per 1U. NOTE that this mount places the USRPs side-by-side which can increase the thermal load on one of the 2 devices. In this setup, make sure the ambient environment is well cooled and ventilated to remove excess heat.

Ettus Research currently offers direct-connect, copper cabling accessories for the USRP N320/N321. However, it is also possible to use multi-mode fiber instead of copper connections for these devices. In this section, we will provide general guidance on the types of fiber adapters and cables that can be used with these products.

The USRP N320/N321 USRP is compatible with most brands of SFP+ fiber adapters. In some cases, other equipment in the systems such as 1/10 Gigabit Ethernet switches are only compatible with specific brands of SFP+ adapters and cables. As a general rule, we recommend checking compatibility with the switches and network cards in your system before purchasing an adapter.

Ettus Research does test the USRP N320/N321 USRP devices with our [10 Gigabit Ethernet Connectivity Kit](#) and a Blade Networks G8124 1/10 GigE switch. Here are is a list of known-good cables and adapters.

Ettus Research has only tested multi-mode fiber accessories.

- [Approved Optics BN-CKM-SP-SR-A](#)
- [Elpeus 10GbE SFP+ AOC Cable, 3 meters](#)

Many new motherboards come equipped with an onboard 10Gb RJ45 NIC. It is possible to use a SFP+ to RJ45 adapter and operate at 10Gb speeds using a Cat6/7 Ethernet cables.

Ettus Research has tested the adapters linked below.

- [10Gtek SFP+ to RJ45 Copper Module](#)
- [ProLabs 10G-SFP-T-C](#)